





Reflector silver Reflector black



1 - 25mm

150 mm, ET 136 mm

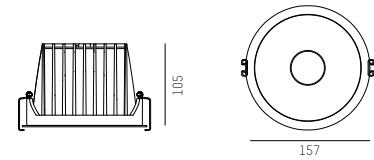

Downlight aus Aluminium
Schwarz oder weiß pulverbeschichtet
Perfekte entblendung durch schwarzen
Kunststoff hochglanz Reflektor schwarz oder silber
Konverter separat ordern

Recessed downlight in aluminium
Black or white powder-coated
Perfect anti-glare due to black or silver high-gloss grid
Please order converter separately

Downlight in alluminio, Verniciato a polvere in nero
Verniciato a polvere in nero o bianco
Anti-abbagliamento garantito da una griglia nera lucida
Converter da ordinare separatamente

Downlight encastré en aluminium, laquée noir
Laquée noir ou blanc
Grille basse-luminance
convertiseur à commander séparément

UGR <16

LED 3500K auf Anfrage / on request

Universal-Betoneinbaugehäuse: siehe Seite 498-499
Universal concrete housing: see page 498-499

A++ - A

IP20

DARK NIGHT MEDIUM R

Binning SDCM 3 exkl. Konverter / excl. converter

Power feed

500mA - 18W

700mA - 25W

900mA - 33W

Order converter not dimm.
Order converter Dali dimm.

24-127532
24-127490

24-127534
24-127490

24-127536
24-127490

684-0020205WWXX
684-0020305WWXX

COLOUR
REFLECTOR

	lm	lm	lm	lm	lm	lm	lm	lm	lm
silver	1580	1640	1760	2100	2190	2340	2580	2680	2870
black	1580	1640	1760	2100	2190	2340	2580	2680	2870

ARTIKELNUMMER ERGÄNZEN / COMPLETE CODE

WW = LICHTFARBE/LIGHT COLOUR

XX = FARBE / COLOUR

	LED 2700K = 43	PREMIUM CRI >90
	LED 3000K = 49	PREMIUM CRI >90
	LED 4000K = 24	CRI >90

	silver = 05
	black = 06

LED CONVERTER DARK NIGHT M

24-127532		schaltbar/switchable	for 500mA	L 130 x B 42 x H 30mm
24-127534		schaltbar/switchable	for 700mA	L 130 x B 42 x H 30mm
24-127536		schaltbar/switchable	for 900mA	L 130 x B 42 x H 30mm
24-127490		DALI dimm.	for 700 - 900mA	L 130 x B 42 x H 30mm

