

# TECHNICAL DATA SHEET




## 200CENT SQUARE 250LM FIX TRIM IP54

BATHROOM - STANZA DA BAGNO - BADEZIMMER - BADKAMER - SALLE DE BAINS - CUARTO DE BAÑO

Fix (not adjustable) 0° - 0°

□ ∅32 mm - h = 95 mm

Material : Aluminium

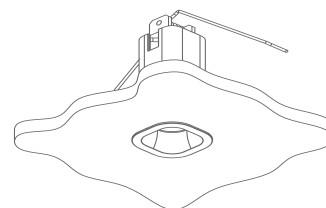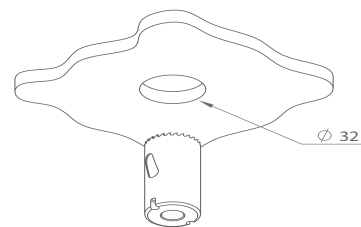

### REF N° 200 BLACK

Black  
Nero  
Schwarz  
Zwart  
Noir  
Negro



### REF N° 200 WHITE

White  
Bianco  
Weiß  
Wit  
Blanc  
Blanco

### 200CENT SQUARE IP54 250LM CRI 92

2200°K	2700°K	3000°K	4000°K
REF N° 526 27 531	REF N° 526 27 931	REF N° 526 27 831	REF N° 526 27 731

3W - 250lm - 2 Step MacAdam - -  
Serial wiring - - - -   
Requires remote LED driver - 1050mA  
Narrow beam 12° - Ultra low glare (UGR < 13)

### REMOTE LED DRIVER ON/OFF

REF N° 697 00 015 min.2W max. 39W

REF N° 697 00 025 min.2W max. 50W

230V/50Hz - - current controlled  
 - - IP20 - 1050mA - not dimmable

### REMOTE LED DRIVER DIM

REF N° 697 60 025 min. 2W max. 60W

1-10V DALI PUSH

230V/50Hz - - current controlled  
 - - IP20 - 1050mA - dimmable

### INSTALLATION KIT

REF N° 680 01 032 standard holesaw ∅32mm



### BEAM ANGLES

STANDARD (included) beam angle 12°



# TECHNICAL DATA SHEET




## 200CENT SQUARE 500LM FIX TRIM IP54

BATHROOM - STANZA DA BAGNO - BADEZIMMER - BADKAMER - SALLE DE BAINS - CUARTO DE BAÑO

Fix (not adjustable) 0° - 0°

Ø32 mm - h = 95 mm

Material : Aluminium

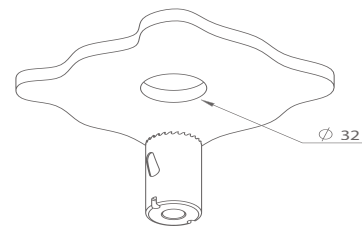

### INSTALLATION KIT

REF N° 680 01 032 standard holesaw Ø32mm



### BEAM ANGLES

STANDARD (included) beam angle 24°

### REF N° 200 BLACK



Black  
Nero  
Schwarz  
Zwart  
Noir  
Negro

### REF N° 200 WHITE



White  
Bianco  
Weiß  
Wit  
Blanc  
Blanco

### 200CENT SQUARE IP54 500LM CRI 92

2200°K	2700°K	3000°K	4000°K
REF N° 526 28 531	REF N° 526 28 931	REF N° 526 28 831	REF N° 526 28 731

5,9 W - 500lm - 2 Step MacAdam - **A+**  
Serial wiring - - **CE** - - -   
Requires remote LED driver - 700mA  
Perfect beam 24° - Ultra low glare (UGR < 13)

### REMOTE LED DRIVER ON/OFF

REF N° 697 00 015 min.2W max. 32W

REF N° 697 00 025 min.2W max. 50W

230V/50Hz - - current controlled  
 - **CE** - IP20 - 700mA - not dimmable

### REMOTE LED DRIVER DIM

REF N° 697 60 040 min. 3W max. 60W  
1-10V DALI PUSH

REF N° 697 77 010 min. 2W max. 10W PHASE DIM

REF N° 697 77 020 min. 11W max. 20W PHASE DIM

REF N° 697 30 015 min. 2W max. 20W DALI

REF N° 697 60 015 min. 2W max. 20W 1-10V PUSH

230V/50Hz - - current controlled  
 - **CE** - IP20 - 700mA - dimmable



# TECHNICAL DATA SHEET




## 200CENT SQUARE 750LM FIX TRIM IP54

BATHROOM - STANZA DA BAGNO - BADEZIMMER - BADKAMER - SALLE DE BAINS - CUARTO DE BAÑO

Fix (not adjustable) 0° - 0°

Ø32 mm - h = 95 mm

Material : Aluminium

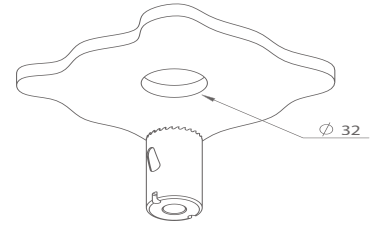

### REF N° 200 BLACK

Black  
Nero  
Schwarz  
Zwart  
Noir  
Negro



### REF N° 200 WHITE

White  
Bianco  
Weiß  
Wit  
Blanc  
Blanco

### 200CENT SQUARE IP54 750LM CRI 92

2400°K	2700°K	3000°K	4000°K
REF N° 526 29 531	REF N° 526 29 931	REF N° 526 29 831	REF N° 526 29 731

6,2 W - 750lm - 2 Step MacAdam - **A+**  
Serial wiring - - - -   
Requires remote LED driver - 250 mA  
Standard beam angle 36°

### REMOTE LED DRIVER ON/OFF

REF N° 697 00 040 min.1W max.30W

REF N° 697 00 080 min.27W max.67W

230V/50Hz - - current controlled  
 - - IP20 - 250mA - not dimmable

### REMOTE LED DRIVER DIM

REF N° 697 60 040 min.3W max.30W  
1-10V DALI PUSH


REF N° 697 60 150 min.20W max.100W 1-10V

REF N° 697 30 150 min.20W max.100W DALI

230V/50Hz - - current controlled  
 - - IP20 - 250mA - dimmable

### INSTALLATION KIT

REF N° 680 01 032 standard holesaw Ø32mm



### BEAM ANGLES

STANDARD (included) beam angle 36°

