

TECHNICAL DATA SHEET




FLUSH 228 IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

389x389 mm

Material : CALCYT® plaster + frosted diffusor

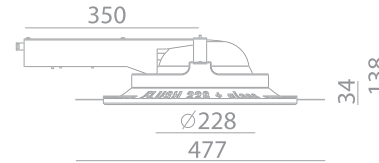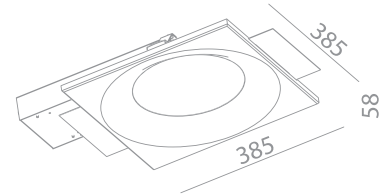

INSTALLATION KIT

STANDARD (included) installation system for ceiling 9 - 12 - 15 mm

REF N° 220 99 025 installation system for gypsum ceiling 25 mm

REF N° 220 99 030 installation system for gypsum ceiling 30 mm

REF N° 812 00 000 Concrete box Flush 228 - Galvanized steel

FLUSH 228 26-32W

REF N° 220 14 064 on/off

REF N° 220 17 064 DIM 1-10V


2x TC-TEL 26-32W
GX24q-3 - 230V/50Hz - incl. EVG
389x389 mm - 0.5m -
CE - IP40 - 850°C - eco

FLUSH 228 42W

REF N° 220 14 084 on/off

REF N° 220 17 084 DIM 1-10V

2x TC-TEL 42W
GX24q-4 - 230V/50Hz - incl. EVG
389x389 mm - 0.5m -
CE - IP40 - 850°C - eco

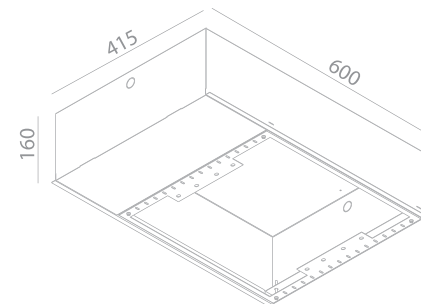

TECHNICAL DATA SHEET


FLUSH 50 IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Adjustable \odot 0° - 30°

194x194 mm

Material : CALCYT® plaster

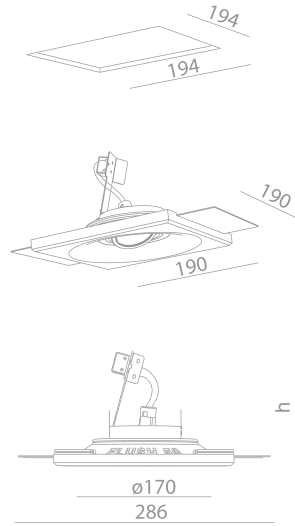

FLUSH 50 LED WARMDIM		
WARMDIM : DIMS FROM 3000°K TO 2000°K		
REF N°	500LM CRI80	900LM CRI90
phase DIM	210 72 640	210 73 640
DIM 1-10V	210 62 640	210 63 640
DIM DALI	210 32 640	210 33 640
6W (500lm) - 12,8W (900lm) - 4 Step MacAdam - 230V/50Hz - - - - Incl. LED driver (phase DIM, 1-10V or DALI) Standard beam angle 36° (options 24°) h = 132 mm		

FLUSH 50 LED 1300LM CRI 80			
REF N°	2700°K	3000°K	4000°K
phase DIM	210 73 040	210 73 140	210 73 240
DIM 1-10V	210 63 040	210 63 140	210 63 240
DIM DALI	210 33 040	210 33 140	210 33 240
Xicato LED - 11,7W - 1300lm - 2 Step MacAdam - 230V/50Hz - - - - Incl. LED driver (phase DIM, 1-10V or DALI) Standard beam angle 36° (options 12°, 24°) h = 132 mm			

FLUSH 50 LED 700LM CRI 80			
REF N°	2700°K	3000°K	4000°K
phase DIM	210 72 040	210 72 140	210 72 240
DIM 1-10V	210 62 040	210 62 140	210 62 240
DIM DALI	210 32 040	210 32 140	210 32 240
Xicato LED - 5,6 W - 720lm - 2 Step MacAdam - 230V/50Hz - - - - Incl. LED driver (phase DIM, 1-10V or DALI) Standard beam angle 36° (options 12°, 24°) h = 132 mm			


FLUSH 50 LED 700LM CRI 97			
REF N°	2700°K	3000°K	4000°K
phase DIM	210 72 940	210 72 840	210 72 740
DIM 1-10V	210 62 940	210 62 840	210 62 740
DIM DALI	210 32 940	210 32 840	210 32 740
Xicato LED - 7,4 W - 720lm - 2 Step MacAdam - 230V/50Hz - - - - Incl. LED driver (phase DIM, 1-10V or DALI) Standard beam angle 36° (options 12°, 24°) h = 132 mm			

FLUSH 50 HAL
REF N° 210 10 050
QR-CBC 51 - 50W - Gx5.3 - 12V - - - - - h = 132 mm - exclusive lamp and transfo

FLUSH 50 ES
REF N° 210 11 050
QPAR 16 - 50W - GZ10/GU10 - - - 230V/50Hz - - - h = 132 mm - exclusive lamp

INSTALLATION KIT

- STANDARD** (included) installation system for ceiling 9 - 12 - 15 mm
- REF N° 210 99 025 installation system for gypsum ceiling 25 mm
- REF N° 210 99 030 installation system for gypsum ceiling 30 mm
- REF N° 810 00 000 Concrete box Flush 50 - Galvanized steel



BEAM ANGLES

- STANDARD** (included) beam angle 36°
- REF N° 205 50 012 optional beam angle 12°
- REF N° 205 50 024 optional beam angle 24°

EMERGENCY UNITS

- REF N° 693 01 001 1h basic + control LED
- REF N° 693 01 003 3h basic + control LED
- REF N° 693 30 001 1h EMPRO DALI
- REF N° 693 30 003 3h EMPRO DALI



TECHNICAL DATA SHEET




FLUSH 111 IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Adjustable \odot 0° - 30°

\square 324x324 mm

Material : CALCYT® plaster



FLUSH 111 LED 3000LM CRI 80

REF N°	2700°K	3000°K	4000°K
on/off	211 26 040	211 26 140	211 26 240
DIM 1-10V	211 66 040	211 66 140	211 66 240
DIM DALI	211 36 040	211 36 140	211 36 240

Xicato LED - 29,3W - 3000lm - 2 Step MacAdam
 \square - 230V/50Hz - CE - ∇ - A - A
 Beam angle 36° (option 20°) - Incl LED driver
 h = 145 mm

FLUSH 111 LED 2000LM CRI 80

REF N°	2700°K	3000°K	4000°K
on/off	211 25 040	211 25 140	211 25 240
phase DIM	211 75 040	211 75 140	211 75 240
DIM 1-10V	211 65 040	211 65 140	211 65 240
DIM DALI	211 35 040	211 35 140	211 35 240

Xicato LED - 19,5W - 2000lm - 2 Step MacAdam
 \square - 230V/50Hz - CE - ∇ - A - A
 Beam 36° (option 20°) - Incl LED driver
 h = 145 mm

INSTALLATION KIT

- STANDARD** (included) installation system for ceiling 9 - 12 - 15 mm
- REF N° 211 99 025** installation system for gypsum ceiling 25 mm
- REF N° 211 99 030** installation system for gypsum ceiling 30 mm
- REF N° 811 00 000** Concrete box Flush 111 - Galvanized steel

FLUSH 111 LED 1300LM CRI 97


REF N°	2700°K	3000°K	4000°K
on/off	211 23 940	211 23 840	211 23 740
phase DIM	211 73 940	211 73 840	211 73 740
DIM 1-10V	211 63 940	211 63 840	211 63 740
DIM DALI	211 33 940	211 33 840	211 33 740

Xicato LED - 17,6W - 1300lm - 2 Step MacAdam
 \square - 230V/50Hz - CE - ∇ - A - A
 Beam angle 36° (option 20°) - Incl LED driver
 h = 145 mm

FLUSH 111 LED 2000LM CRI 97

REF N°	2700°K	3000°K	4000°K
on/off	211 25 940	211 25 840	211 25 740
phase DIM	211 75 940	211 75 840	211 75 740
DIM 1-10V	211 65 940	211 65 840	211 65 740
DIM DALI	211 35 940	211 35 840	211 35 740

Xicato LED - 22,3W - 2000lm - 2 Step MacAdam
 \square - 230V/50Hz - CE - ∇ - A - A
 Beam angle 36° (option 20°) - Incl LED driver
 h = 145 mm



BEAM ANGLES & OPTIONS

- STANDARD** (included) beam angle 36°
- REF N° 205 11 020** optional beam angle 20°
- REF N° 201 00 060** Frosted diffusor for 111 LED series

FLUSH 111 AR

REF N° 211 13 100

QR-LP 111 - 100W - G53 - 12V - D
 excl. transfo - D - D - 1.0m - D - D - D - D
 h = 136 mm

FLUSH 111 CDM

REF N° 211 19 070 CDM-TC - G8.5

REF N° 211 12 070 CDM-R - GX8.5

35W or 70W - 230V/50Hz - D - excl. EVG
 h = 145 mm - D - D - 0.5m - D - D - D

EMERGENCY UNITS

- REF N° 693 01 001** 1h basic + control LED
- REF N° 693 01 003** 3h basic + control LED
- REF N° 693 30 001** 1h EMPRO DALI
- REF N° 693 30 003** 3h EMPRO DALI

