

TECHNICAL DATA SHEET

FUSION XL 50 IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTERIOR

Adjustable $\odot$ 0° - 30°

 404x404 mm

Material : CALCYT® plaster

FUSION XL 50 LED 700LM CRI 80 REMOTE DRIVER

REF N° 260 29 040 Adj. $\odot$ 2700K

REF N° 260 29 140 Adj. $\odot$ 3000K

REF N° 260 29 240 Adj. $\odot$ 4000K

Xicato LED - 5,6 W - 720lm @ 70°C

 -excl LED driver

requires remote led driver @ 350 mA

36° - ∇ - I 0.5m -  - 850°C -

2 Step MacAdam - Semi recessed - 

FUSION XL 50 LED 700LM CRI 97 REMOTE DRIVER

REF N° 260 29 940 Adj. $\odot$ 2700K

REF N° 260 29 840 Adj. $\odot$ 3000K

REF N° 260 29 740 Adj. $\odot$ 4000K

Xicato LED - 7,4 W - 720lm @ 70°C

 - exclusive LED driver

requires remote led driver @ 350 mA

36° - ∇ - I 0.5m -  - 850°C -

2 Step MacAdam - Semi recessed - 

REMOTE LED DRIVER ON/OFF

REF N° 697 00 025 25W

230V/50Hz -  - current controlled

∇ -  - IP20 - 350/700mA - not dimmable

REMOTE LED DRIVER DIM

REF N° 697 60 025 25W 1-10V DALI PUSH

REF N° 697 60 040 40W 1-10V DALI PUSH

REF N° 697 70 017 17W PHASE DIM

230V/50Hz -  - current controlled

∇ -  - IP20 - 350/700mA - dimmable

FUSION XL 50 HAL

REF N° 260 10 050 Adj. $\odot$ IP20

 QR-CBC 51 - 50W - Gx5.3 - 12V - 

excl lamp and transfo - ∇ - I 0.5m - 850°C

 - Semi recessed - 




FUSION XL 50 ES

REF N° 260 11 050 Adj. $\odot$ IP20

 QPAR 16 - 50W - GZ10/GU10 - 

230V/50Hz - excl. lamp - ∇ - I 0.5m - 850°C

 - Semi recessed - 

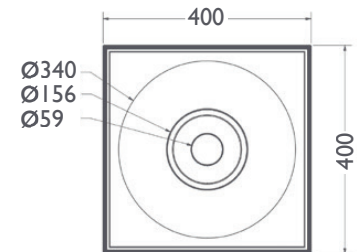

INSTALLATION KIT

STANDARD (included) installation system for ceiling 9 - 12 - 15 mm

REF N° 260 99 025 installation system for gypsum ceiling 25 mm

REF N° 260 99 030 installation system for gypsum ceiling 30 mm

BEAM ANGLES

STANDARD (included) beam angle 36°



TECHNICAL DATA SHEET

FUSION S 50 IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Adjustable $\odot$ 0° - 30°

 404x404 mm

Material : CALCYT® plaster

FUSION S 50 LED 700LM CRI 80 REMOTE DRIVER

REF N° 283 29 040 Adj. $\odot$ 2700K

REF N° 283 29 140 Adj. $\odot$ 3000K

REF N° 283 29 240 Adj. $\odot$ 4000K

Xicato LED - 5,6 W - 720lm @ 70°C

 -excl LED driver

requires remote led driver @ 350 mA

36° - ∇ -  -  - 850°C -

2 Step MacAdam - Semi recessed - 

FUSION S 50 LED 700LM CRI 97 REMOTE DRIVER

REF N° 283 29 940 Adj. $\odot$ 2700K

REF N° 283 29 840 Adj. $\odot$ 3000K

REF N° 283 29 740 Adj. $\odot$ 4000K

Xicato LED - 7,4 W - 720lm @ 70°C

 - exclusive LED driver

requires remote led driver @ 350 mA

36° - ∇ -  -  - 850°C -

2 Step MacAdam - Semi recessed - 

REMOTE LED DRIVER ON/OFF

REF N° 697 00 025 25W

230V/50Hz -  - current controlled

∇ -  - IP20 - 350/700mA - not dimmable

REMOTE LED DRIVER DIM

REF N° 697 60 025 25W 1-10V DALI PUSH

REF N° 697 60 040 40W 1-10V DALI PUSH

REF N° 697 70 017 17W PHASE DIM

230V/50Hz -  - current controlled

∇ -  - IP20 - 350/700mA - dimmable

FUSION S 50 HAL

REF N° 283 10 050 Adj. $\odot$ IP20

 QR-CBC 51 - 50W - Gx5.3 - 12V -  

excl lamp and transfo - ∇ -  -  - 850°C

 - Semi recessed - 




FUSION S 50 ES

REF N° 283 11 050 Adj. $\odot$ IP20

 QPAR 16 - 50W - GZ10/GU10 -  

230V/50Hz - excl. lamp - ∇ -  -  - 850°C

 - Semi recessed - 



INSTALLATION KIT

STANDARD (included) installation system for ceiling 9 - 12 - 15 mm

REF N° 283 99 025 installation system for gypsum ceiling 25 mm

REF N° 283 99 030 installation system for gypsum ceiling 30 mm

BEAM ANGLES

STANDARD (included) beam angle 36°

