

TECHNICAL DATA SHEET


IMPRESSION IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

186x1295 mm

Material : CALCYT® plaster

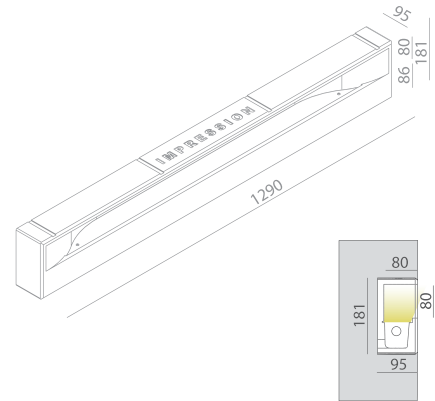


Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT IMPRESSION

REF N° 717 01 000 For mounting into gypsum walls

Housing: perforated aluminium

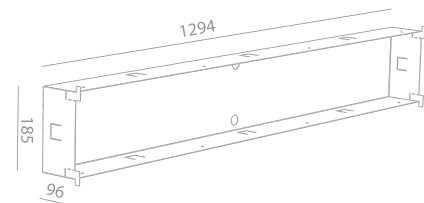

IMPRESSION FLUO

REF N° 317 15 021 on/off

REF N° 317 18 021 DIM 1-10V


REF N° 317 30 021 DIM DALI

1x T16 - 21/39W
G5 - 230V/50Hz - incl. EVG
0.5m - IP20 - 850°C
ECCO

IMPRESSION LED 3000LM 230 VAC

| REF N° | 2700°K | 3000°K |
|-----------|------------|------------|
| on/off | 317 25 000 | 317 25 100 |
| DIM 1-10V | 317 65 000 | 317 65 100 |
| DIM DALI | 317 35 000 | 317 35 100 |

230V/50Hz - 28,5W - 3000lm@65°C -
3300lm@25°C - IP20 - CRI 80
parallel wiring - 0.2m - 850°C
Integrated line voltage LED driver
Connects directly to 230 VAC
4 SDCM - 4 Step MacAdam - IA

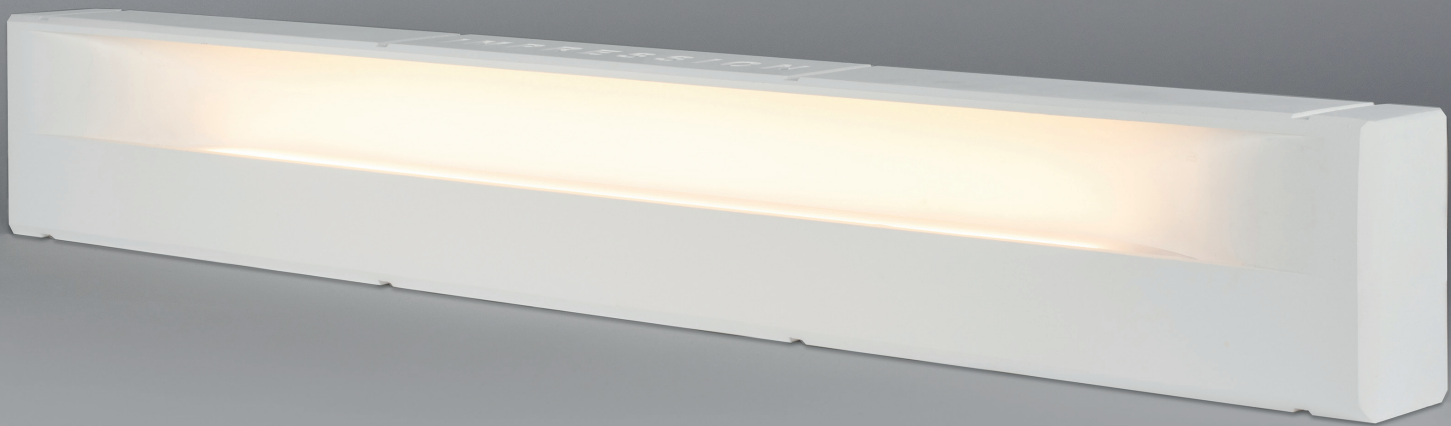

TECHNICAL DATA SHEET



EXPRESSION MONO IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

☐ 115x1295 mm

Material : CALCYT® plaster

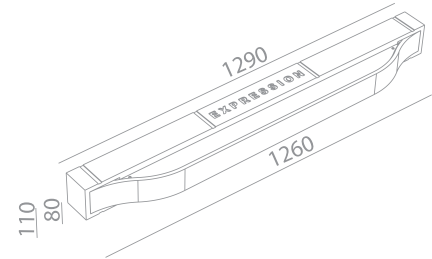


Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT EXPRESSION

REF N° 718 01 000 For mounting into gypsum walls

☐ 115x1295 mm. Housing: perforated aluminium

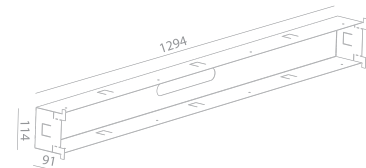

EXPRESSION MONO FLUO

REF N° 318 15 021 on/off

REF N° 318 18 021 DIM 1-10V


REF N° 318 30 021 DIM DALI

☐ 1x T16 - 21/39W
G5 - 230V/50Hz - - incl. EVG
 - - - IP20 - 850°C
 -

EXPRESSION MONO LED 3000LM 230 VAC

| REF N° | 2700°K | 3000°K |
|-----------|------------|------------|
| on/off | 318 25 000 | 318 25 100 |
| DIM 1-10V | 318 65 000 | 318 65 100 |
| DIM DALI | 318 35 000 | 318 35 100 |

230V/50Hz - 28,5W - 3000lm@65°C -
3300lm@25°C - - - IP20 - CRI 80
parallel wiring - - 850°C
Integrated line voltage LED driver
Connects directly to 230 VAC
4 SDCM - 4 Step MacAdam -

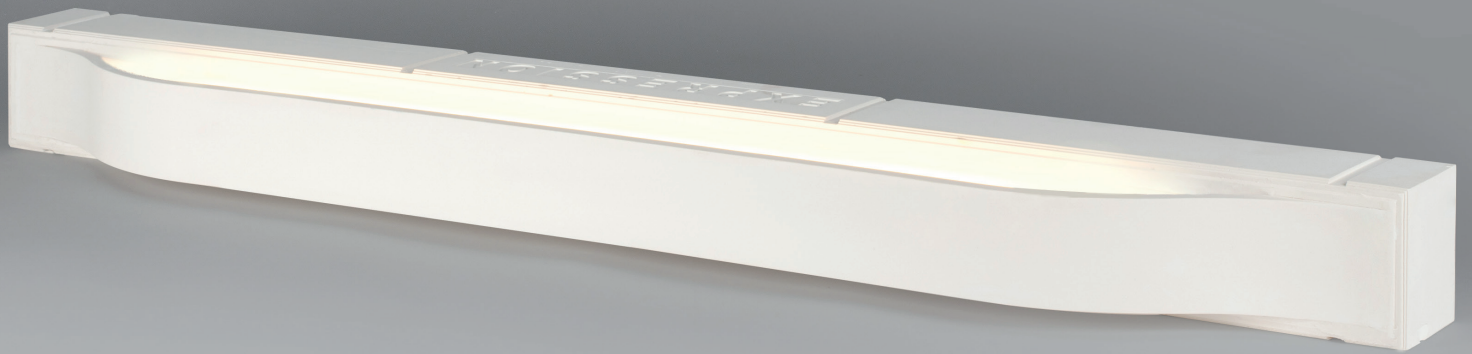

TECHNICAL DATA SHEET



EXPRESSION DUO IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

☐ 115x1295 mm

Material : CALCYT® plaster

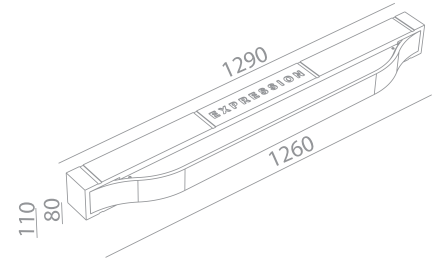


Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT EXPRESSION

REF N° 718 01 000 For mounting into gypsum walls

☐ 115x1295 mm. Housing: perforated aluminium

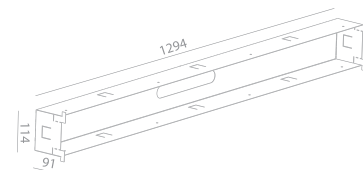

EXPRESSION DUO FLUO

REF N° 319 15 021 on/off

REF N° 319 18 021 DIM 1-10V

REF N° 319 30 021 DIM DALI

☐ 1x T16 - 21/39W
G5 - 230V/50Hz - - incl. EVG
 - - - - IP20 - 850°C
 -

EXPRESSION DUO LED 3000LM 230 VAC

| REF N° | 2700°K | 3000°K |
|-----------|------------|------------|
| on/off | 319 25 000 | 319 25 100 |
| DIM 1-10V | 319 65 000 | 319 65 100 |
| DIM DALI | 319 35 000 | 319 35 100 |

230V/50Hz - 28,5W - 3000lm@65°C -
3300lm@25°C - - - IP20 - CRI 80
parallel wiring - - 850°C
Integrated line voltage LED driver
Connects directly to 230 VAC
4 SDCM - 4 Step MacAdam -

