

TECHNICAL DATA SHEET

MOOR 8 LARGE IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

□ 225x580 mm

Material : CALCYT® plaster

MOOR 8 LARGE LED WARMDIM 900LM 230VAC	
WARMDIM : DIMS FROM 3000°K TO 2000°K	
REF N° 102 78 630	phase DIM
REF N° 102 68 630	DIM 1-10V
REF N° 102 38 630	DIM DALI
230V/50Hz - 12,8W - incl. line voltage driver - parallel wiring - - 4 Step MacAdam - CRI 90 -	


MOOR 8 LARGE LED 800LM 230VAC			
REF N°	2200°K	2700°K	3000°K
phase DIM	102 78 500	102 78 000	102 78 100
DIM 1-10V	102 68 500	102 68 000	102 68 100
DIM DALI	102 38 500	102 38 000	102 38 100
230V/50Hz - 9,3W - incl. line voltage driver - parallel wiring - - 2 Step MacAdam - CRI 90 - R9=75 -			

MOOR 8 LARGE LED 1000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	102 78 020	102 78 120	102 78 220
DIM 1-10V	102 68 020	102 68 120	102 68 220
DIM DALI	102 38 020	102 38 120	102 38 220
230V/50Hz - 11W - incl. line voltage driver - parallel wiring - - 2 Step MacAdam - CRI 90 - R9=75 -			

MOOR 8 LARGE LED 2000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	102 78 040	102 78 140	102 78 240
DIM 1-10V	102 68 040	102 68 140	102 68 240
DIM DALI	102 38 040	102 38 140	102 38 240
230V/50Hz - 14,1W - incl. line voltage driver - parallel wiring - - 2 Step MacAdam - CRI 80 -			

MOOR 8 LARGE HAL	
REF N° 102 08 060	
QT-DE - max 60 W - R7s (74.5mm) 230V/50Hz - - - -	


MOOR 8 LARGE FLUO	
REF N° 102 08 026	
TC-DEL 26W - G24q-3 - 230V/50Hz - incl. EVG - - -	

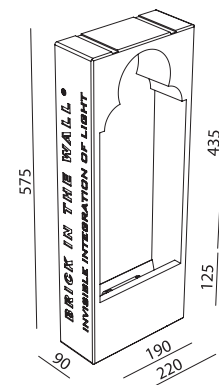

Ready for installation in solid walls
 Optional plasterkit for installation into gypsum walls

PLASTERKIT MOOR LARGE 6/7/8

REF N° 702 03 000 For mounting into gypsum walls

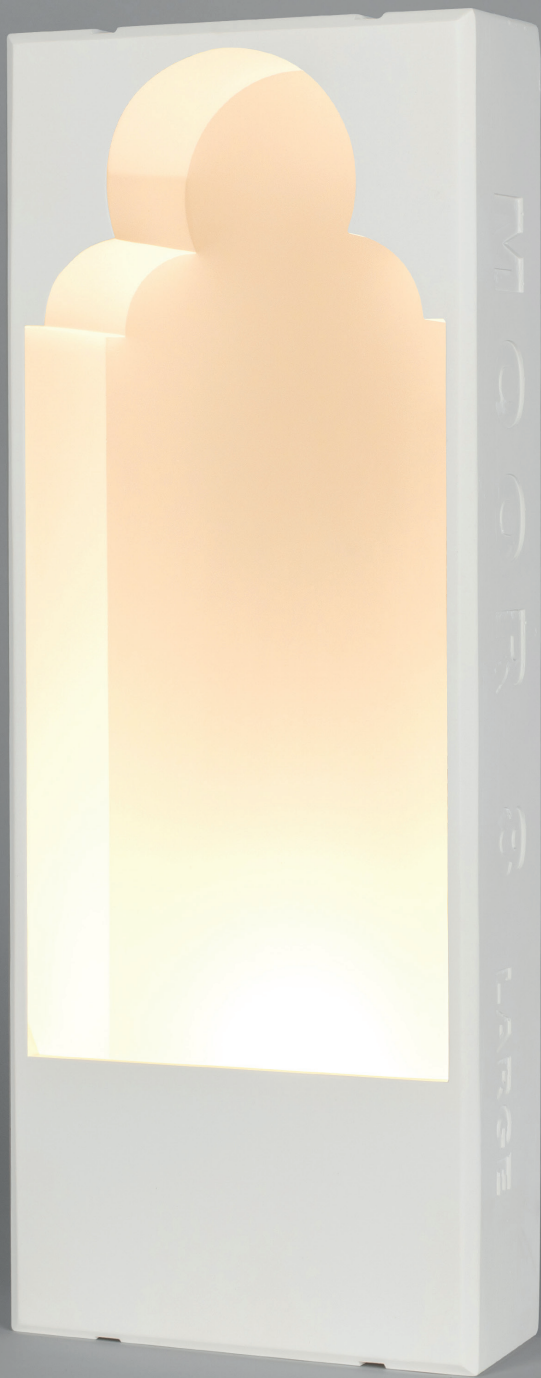

TECHNICAL DATA SHEET

MOOR 8 IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

□ 225x480 mm

Material : CALCYT® plaster

MOOR 8 LED WARMDIM 900LM 230VAC	
WARMDIM : DIMS FROM 3000°K TO 2000°K	
REF N° 101 78 630	phase DIM
REF N° 101 68 630	DIM 1-10V
REF N° 101 38 630	DIM DALI
230V/50Hz - 12,8W - incl. line voltage driver ◊ - parallel wiring ▽ (0.2m) E-CE-Ⓟ - 4 Step MacAdam - CRI 90 - B	


MOOR 8 LED 800LM 230VAC			
REF N°	2200°K	2700°K	3000°K
phase DIM	101 78 500	101 78 000	101 78 100
DIM 1-10V	101 68 500	101 68 000	101 68 100
DIM DALI	101 38 500	101 38 000	101 38 100
230V/50Hz - 9,3W - incl. line voltage driver ◊ - parallel wiring ▽ (0.2m) E-CE-Ⓟ - 2 Step MacAdam - CRI 90 - R9=75 - A			

MOOR 8 LED 1000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	101 78 020	101 78 120	101 78 220
DIM 1-10V	101 68 020	101 68 120	101 68 220
DIM DALI	101 38 020	101 38 120	101 38 220
230V/50Hz - 11W - incl. line voltage driver ◊ - parallel wiring ▽ (0.2m) E-CE-Ⓟ - 2 Step MacAdam - CRI 90 - R9=75 - A			

MOOR 8 LED 2000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	101 78 040	101 78 140	101 78 240
DIM 1-10V	101 68 040	101 68 140	101 68 240
DIM DALI	101 38 040	101 38 140	101 38 240
230V/50Hz - 14,1W - incl. line voltage driver ◊ - parallel wiring ▽ (0.2m) E-CE-Ⓟ - 2 Step MacAdam - CRI 80 - A+			

MOOR 8 HAL	
REF N° 101 08 060	
QT-DE - max 60 W - R7s (74.5mm) 230V/50Hz - ◊ - ▽ (0.5m) E-CE-Ⓟ - D	

MOOR 8 FLUO	
REF N° 101 08 026	
TC-DEL 26W - G24q-3 - 230V/50Hz ◊ - incl. EVG - ▽ (0.5m) E-CE-Ⓟ - B	

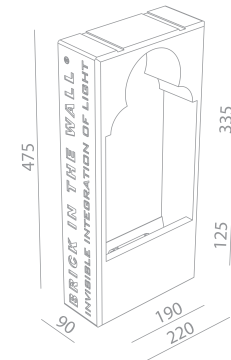

Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT MOOR 6/7/8
REF N° 701 03 000 For mounting into gypsum walls



TECHNICAL DATA SHEET

MOOR 7 LARGE IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

□ 225x580 mm

Material : CALCYT® plaster

MOOR 7 LARGE LED WARMDIM 900LM 230VAC			
WARMDIM : DIMS FROM 3000°K TO 2000°K			
REF N° 102 77 630	phase DIM		
REF N° 102 67 630	DIM 1-10V		
REF N° 102 37 630	DIM DALI		
230V/50Hz - 12,8W - incl. line voltage driver \diamond - parallel wiring ∇ \downarrow0.2m\equiv E-CE - © - 4 Step MacAdam - CRI 90 - B >			


MOOR 7 LARGE LED 800LM 230VAC			
REF N°	2200°K	2700°K	3000°K
phase DIM	102 77 500	102 77 000	102 77 100
DIM 1-10V	102 67 500	102 67 000	102 67 100
DIM DALI	102 37 500	102 37 000	102 37 100
230V/50Hz - 9,3W - incl. line voltage driver \diamond - parallel wiring ∇ \downarrow0.2m\equiv E-CE - © - 2 Step MacAdam - CRI 90 - R9=75 - A >			

MOOR 7 LARGE LED 1000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	102 77 020	102 77 120	102 77 220
DIM 1-10V	102 67 020	102 67 120	102 67 220
DIM DALI	102 37 020	102 37 120	102 37 220
230V/50Hz - 11W - incl. line voltage driver \diamond - parallel wiring ∇ \downarrow0.2m\equiv E-CE - © - 2 Step MacAdam - CRI 90 - R9=75 - A >			

MOOR 7 LARGE LED 2000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	102 77 040	102 77 140	102 77 240
DIM 1-10V	102 67 040	102 67 140	102 67 240
DIM DALI	102 37 040	102 37 140	102 37 240
230V/50Hz - 14,1W - incl. line voltage driver \diamond - parallel wiring ∇ \downarrow0.2m\equiv E-CE - © - 2 Step MacAdam - CRI 80 - A+ >			


MOOR 7 LARGE HAL	
REF N° 102 07 060	
QT-DE - max 60 W - R7s (74.5mm) 230V/50Hz - \diamond - ∇ \downarrow0.5m\equiv E-CE - © - D >	

MOOR 7 LARGE FLUO	
REF N° 102 07 026	
TC-DEL 26W - G24q-3 - 230V/50Hz \diamond - incl. EVG - ∇ \downarrow0.5m\equiv E-CE - © - B >	

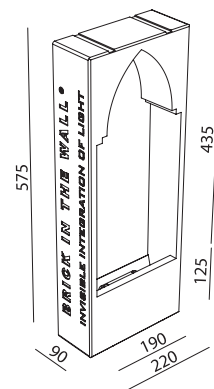

Ready for installation in solid walls
 Optional plasterkit for installation into gypsum walls

PLASTERKIT
MOOR LARGE 6/7/8
 REF N° 702 03 000 For mounting into gypsum walls

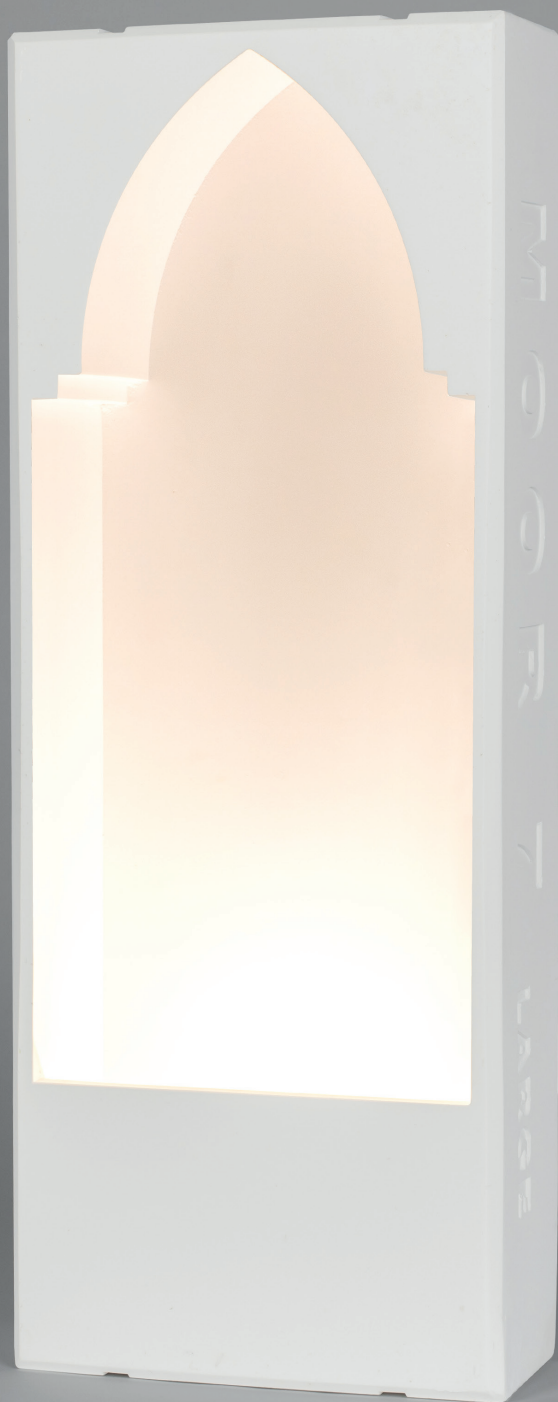

TECHNICAL DATA SHEET

MOOR 7 IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

□ 225x480 mm

Material : CALCYT® plaster

MOOR 7 LED WARMDIM 900LM 230VAC			
WARMDIM : DIMS FROM 3000°K TO 2000°K			
REF N°	2200°K	2700°K	3000°K
phase DIM	101 77 630	101 77 000	101 77 100
DIM 1-10V	101 67 630	101 67 000	101 67 100
DIM DALI	101 37 630	101 37 000	101 37 100
230V/50Hz - 12,8W - incl. line voltage driver ◇ - parallel wiring ▽ (0.2m) E-CE-Ⓟ - 4 Step MacAdam - CRI 90 - B			


MOOR 7 LED 800LM 230VAC			
REF N°	2200°K	2700°K	3000°K
phase DIM	101 77 500	101 77 000	101 77 100
DIM 1-10V	101 67 500	101 67 000	101 67 100
DIM DALI	101 37 500	101 37 000	101 37 100
230V/50Hz - 9,3W - incl. line voltage driver ◇ - parallel wiring ▽ (0.2m) E-CE-Ⓟ - 2 Step MacAdam - CRI 90 - R9=75 - A			

MOOR 7 LED 1000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	101 77 020	101 77 120	101 77 220
DIM 1-10V	101 67 020	101 67 120	101 67 220
DIM DALI	101 37 020	101 37 120	101 37 220
230V/50Hz - 11W - incl. line voltage driver ◇ - parallel wiring ▽ (0.2m) E-CE-Ⓟ - 2 Step MacAdam - CRI 90 - R9=75 - A			

MOOR 7 LED 2000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	101 77 040	101 77 140	101 77 240
DIM 1-10V	101 67 040	101 67 140	101 67 240
DIM DALI	101 37 040	101 37 140	101 37 240
230V/50Hz - 14,1W - incl. line voltage driver ◇ - parallel wiring ▽ (0.2m) E-CE-Ⓟ - 2 Step MacAdam - CRI 80 - A+			

MOOR 7 HAL	
REF N°	101 07 060
QT-DE - max 60 W - R7s (74.5mm) 230V/50Hz - ◇ - ▽ (0.5m) E-CE-Ⓟ - D	

MOOR 7 FLUO	
REF N°	101 07 026
TC-DEL 26W - G24q-3 - 230V/50Hz ◇ - incl. EVG - ▽ (0.5m) E-CE-Ⓟ - B	

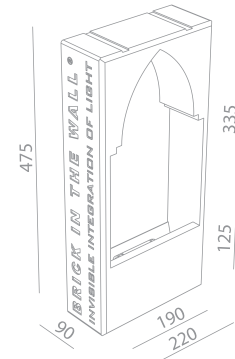

Ready for installation in solid walls
 Optional plasterkit for installation into gypsum walls

PLASTERKIT MOOR 6/7/8
 REF N° 701 03 000 For mounting into gypsum walls



TECHNICAL DATA SHEET

MOOR 6 LARGE IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

□ 225x580 mm

Material : CALCYT® plaster

MOOR 6 LARGE LED WARMDIM 900LM 230VAC	
WARMDIM : DIMS FROM 3000°K TO 2000°K	
REF N° 102 76 630	phase DIM
REF N° 102 66 630	DIM 1-10V
REF N° 102 36 630	DIM DALI
230V/50Hz - 12,8W - incl. line voltage driver ◊ - parallel wiring ▽ (0.2m) E-CE - P - 4 Step MacAdam - CRI 90 - B	


MOOR 6 LARGE LED 800LM 230VAC			
REF N°	2200°K	2700°K	3000°K
phase DIM	102 76 500	102 76 000	102 76 100
DIM 1-10V	102 66 500	102 66 000	102 66 100
DIM DALI	102 36 500	102 36 000	102 36 100
230V/50Hz - 9,3W - incl. line voltage driver ◊ - parallel wiring ▽ (0.2m) E-CE - P - 2 Step MacAdam - CRI 90 - R9=75 - A			

MOOR 6 LARGE LED 1000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	102 76 020	102 76 120	102 76 220
DIM 1-10V	102 66 020	102 66 120	102 66 220
DIM DALI	102 36 020	102 36 120	102 36 220
230V/50Hz - 11W - incl. line voltage driver ◊ - parallel wiring ▽ (0.2m) E-CE - P - 2 Step MacAdam - CRI 90 - R9=75 - A			

MOOR 6 LARGE LED 2000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	102 76 040	102 76 140	102 76 240
DIM 1-10V	102 66 040	102 66 140	102 66 240
DIM DALI	102 36 040	102 36 140	102 36 240
230V/50Hz - 14,1W - incl. line voltage driver ◊ - parallel wiring ▽ (0.2m) E-CE - P - 2 Step MacAdam - CRI 80 - A			

MOOR 6 LARGE HAL	
REF N° 102 06 060	
QT-DE - max 60 W - R7s (74.5mm) 230V/50Hz - ◊ - ▽ (0.5m) E-CE - P - D	

MOOR 6 LARGE FLUO	
REF N° 102 06 026	
TC-DEL 26W - G24q-3 - 230V/50Hz ◊ - incl. EVG - ▽ (0.5m) E-CE - P - B	

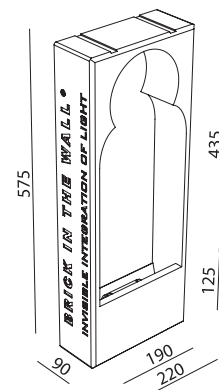

Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT MOOR LARGE 6/7/8

REF N° 702 03 000 For mounting into gypsum walls



TECHNICAL DATA SHEET

MOOR 6 IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

□ 225x480 mm

Material : CALCYT® plaster

MOOR 6 LED WARMDIM 900LM 230VAC			
WARMDIM : DIMS FROM 3000°K TO 2000°K			
REF N°	2200°K	2700°K	3000°K
phase DIM	101 76 630	101 76 630	101 76 630
DIM 1-10V	101 66 630	101 66 630	101 66 630
DIM DALI	101 36 630	101 36 630	101 36 630
230V/50Hz - 12,8W - incl. line voltage driver ◊ - parallel wiring ▽ (0.2m) E-CE-Ⓟ - 4 Step MacAdam - CRI 90 - B			


MOOR 6 LED 800LM 230VAC			
REF N°	2200°K	2700°K	3000°K
phase DIM	101 76 500	101 76 000	101 76 100
DIM 1-10V	101 66 500	101 66 000	101 66 100
DIM DALI	101 36 500	101 36 000	101 36 100
230V/50Hz - 9,3W - incl. line voltage driver ◊ - parallel wiring ▽ (0.2m) E-CE-Ⓟ - 2 Step MacAdam - CRI 90 - R9=75 - A			

MOOR 6 LED 1000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	101 76 020	101 76 120	101 76 220
DIM 1-10V	101 66 020	101 66 120	101 66 220
DIM DALI	101 36 020	101 36 120	101 36 220
230V/50Hz - 11W - incl. line voltage driver ◊ - parallel wiring ▽ (0.2m) E-CE-Ⓟ - 2 Step MacAdam - CRI 90 - R9=75 - A			

MOOR 6 LED 2000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	101 76 040	101 76 140	101 76 240
DIM 1-10V	101 66 040	101 66 140	101 66 240
DIM DALI	101 36 040	101 36 140	101 36 240
230V/50Hz - 14,1W - incl. line voltage driver ◊ - parallel wiring ▽ (0.2m) E-CE-Ⓟ - 2 Step MacAdam - CRI 80 - A+			

MOOR 6 HAL	
REF N°	101 06 060
QT-DE - max 60 W - R7s (74.5mm) 230V/50Hz - ◊ - ▽ (0.5m) E-CE-Ⓟ - D	

MOOR 6 FLUO	
REF N°	101 06 026
TC-DEL 26W - G24q-3 - 230V/50Hz ◊ - incl. EVG - ▽ (0.5m) E-CE-Ⓟ - B	

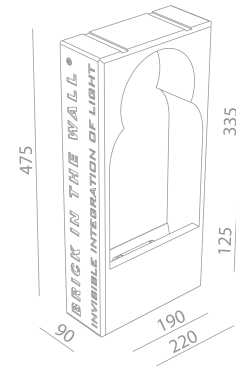

Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT MOOR 6/7/8
REF N° 701 03 000 For mounting into gypsum walls



TECHNICAL DATA SHEET

MOOR 5 LARGE IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

□ 225x545 mm

Material : CALCYT® plaster

MOOR 5 LARGE LED WARMDIM 900LM 230VAC			
WARMDIM : DIMS FROM 3000°K TO 2000°K			
REF N° 102 75 630	phase DIM		
REF N° 102 65 630	DIM 1-10V		
REF N° 102 35 630	DIM DALI		
230V/50Hz - 12,8W - incl. line voltage driver \diamond - parallel wiring ∇ \downarrow0.2m\equiv E CE - P - D - 4 Step MacAdam - CRI 90 - B >			


MOOR 5 LARGE LED 800LM 230VAC			
REF N°	2200°K	2700°K	3000°K
phase DIM	102 75 500	102 75 000	102 75 100
DIM 1-10V	102 65 500	102 65 000	102 65 100
DIM DALI	102 35 500	102 35 000	102 35 100
230V/50Hz - 9,3W - incl. line voltage driver \diamond - parallel wiring ∇ \downarrow0.2m\equiv E CE - P - D - 2 Step MacAdam - CRI 90 - R9=75 - A >			

MOOR 5 LARGE LED 1000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	102 75 020	102 75 120	102 75 220
DIM 1-10V	102 65 020	102 65 120	102 65 220
DIM DALI	102 35 020	102 35 120	102 35 220
230V/50Hz - 11W - incl. line voltage driver \diamond - parallel wiring ∇ \downarrow0.2m\equiv E CE - P - D - 2 Step MacAdam - CRI 90 - R9=75 - A >			

MOOR 5 LARGE LED 2000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	102 75 040	102 75 140	102 75 240
DIM 1-10V	102 65 040	102 65 140	102 65 240
DIM DALI	102 35 040	102 35 140	102 35 240
230V/50Hz - 14,1W - incl. line voltage driver \diamond - parallel wiring ∇ \downarrow0.2m\equiv E CE - P - D - 2 Step MacAdam - CRI 80 - A^+ >			


MOOR 5 LARGE HAL	
REF N° 102 05 060	
⚡ QT-DE - max 60 W - R7s (74.5mm) 230V/50Hz - \diamond - ∇ \downarrow0.5m\equiv E - CE - P - D >	

MOOR 5 LARGE FLUO	
REF N° 102 05 026	
⚡ TC-DEL 26W - G24q-3 - 230V/50Hz \diamond - incl. EVG - ∇ \downarrow0.5m\equiv E - CE - P - B >	

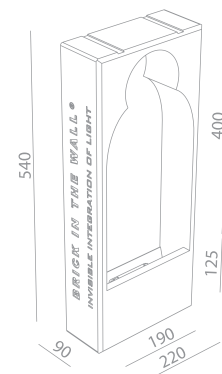

Ready for installation in solid walls
 Optional plasterkit for installation into gypsum walls

PLASTERKIT
MOOR LARGE 4/5
 REF N° 702 02 000 For mounting into gypsum walls

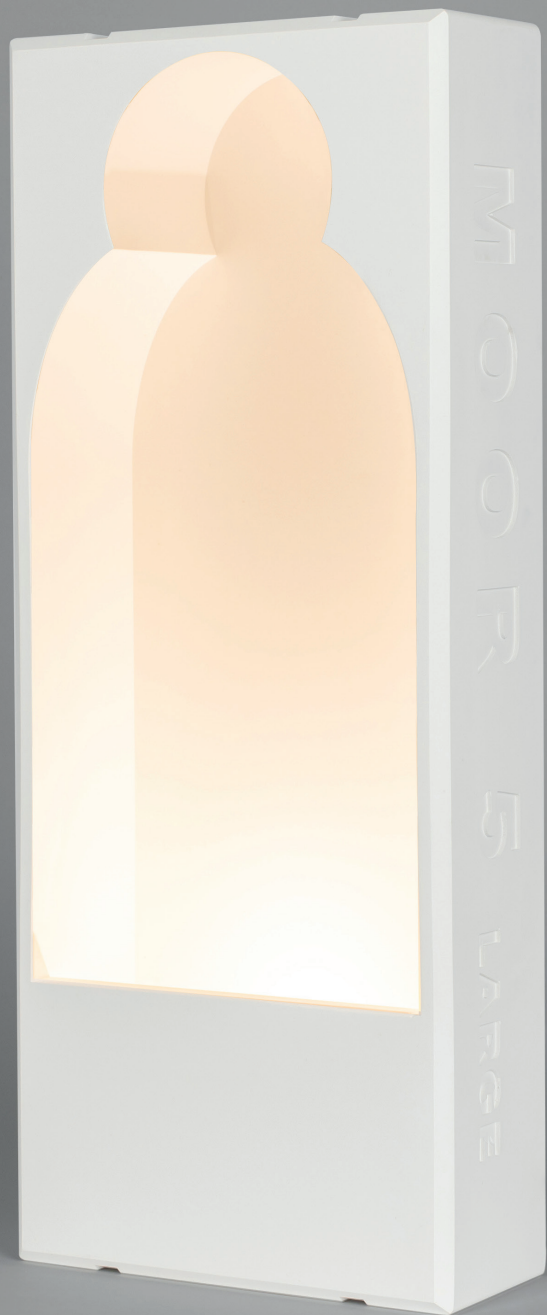

TECHNICAL DATA SHEET

MOOR 5 IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

□ 225x445 mm

Material : CALCYT® plaster

MOOR 5 LED WARMDIM 900LM 230VAC			
WARMDIM : DIMS FROM 3000°K TO 2000°K			
REF N°	2200°K	2700°K	3000°K
phase DIM	101 75 630	101 75 000	101 75 100
DIM 1-10V	101 65 630	101 65 000	101 65 100
DIM DALI	101 35 630	101 35 000	101 35 100
230V/50Hz - 12,8W - incl. line voltage driver ◊ - parallel wiring ▽ (0.2m) E-CE-Ⓟ - 4 Step MacAdam - CRI 90 - B			


MOOR 5 LED 800LM 230VAC			
REF N°	2200°K	2700°K	3000°K
phase DIM	101 75 500	101 75 000	101 75 100
DIM 1-10V	101 65 500	101 65 000	101 65 100
DIM DALI	101 35 500	101 35 000	101 35 100
230V/50Hz - 9,3W - incl. line voltage driver ◊ - parallel wiring ▽ (0.2m) E-CE-Ⓟ - 2 Step MacAdam - CRI 90 - R9=75 - A			

MOOR 5 LED 1000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	101 75 020	101 75 120	101 75 220
DIM 1-10V	101 65 020	101 65 120	101 65 220
DIM DALI	101 35 020	101 35 120	101 35 220
230V/50Hz - 11W - incl. line voltage driver ◊ - parallel wiring ▽ (0.2m) E-CE-Ⓟ - 2 Step MacAdam - CRI 90 - R9=75 - A			

MOOR 5 LED 2000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	101 75 040	101 75 140	101 75 240
DIM 1-10V	101 65 040	101 65 140	101 65 240
DIM DALI	101 35 040	101 35 140	101 35 240
230V/50Hz - 14,1W - incl. line voltage driver ◊ - parallel wiring ▽ (0.2m) E-CE-Ⓟ - 2 Step MacAdam - CRI 80 - A+			

MOOR 5 HAL	
REF N°	101 05 060
QT-DE - max 60 W - R7s (74.5mm) 230V/50Hz - ◊ - ▽ (0.5m) E-CE-Ⓟ - D	

MOOR 5 FLUO	
REF N°	101 05 026
TC-DEL 26W - G24q-3 - 230V/50Hz ◊ - incl. EVG - ▽ (0.5m) E-CE-Ⓟ - B	

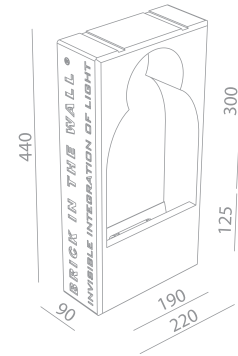

Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT MOOR 4/5

REF N° 701 02 000 For mounting into gypsum walls



TECHNICAL DATA SHEET

MOOR 4 LARGE IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

□ 225x545 mm

Material : CALCYT® plaster

MOOR 4 LARGE LED WARMDIM 900LM 230VAC	
WARMDIM : DIMS FROM 3000°K TO 2000°K	
REF N° 102 74 630	phase DIM
REF N° 102 64 630	DIM 1-10V
REF N° 102 34 630	DIM DALI
230V/50Hz - 12,8W - incl. line voltage driver $\langle \rangle$ - parallel wiring ∇ \downarrow0.2m\equiv E CE - P - D - 4 Step MacAdam - CRI 90 - B	


MOOR 4 LARGE LED 800LM 230VAC			
REF N°	2200°K	2700°K	3000°K
phase DIM	102 74 500	102 74 000	102 74 100
DIM 1-10V	102 64 500	102 64 000	102 64 100
DIM DALI	102 34 500	102 34 000	102 34 100
230V/50Hz - 9,3W - incl. line voltage driver $\langle \rangle$ - parallel wiring ∇ \downarrow0.2m\equiv E CE - P - D - 2 Step MacAdam - CRI 90 - R9=75 - A			

MOOR 4 LARGE LED 1000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	102 74 020	102 74 120	102 74 220
DIM 1-10V	102 64 020	102 64 120	102 64 220
DIM DALI	102 34 020	102 34 120	102 34 220
230V/50Hz - 11W - incl. line voltage driver $\langle \rangle$ - parallel wiring ∇ \downarrow0.2m\equiv E CE - P - D - 2 Step MacAdam - CRI 90 - R9=75 - A			

MOOR 4 LARGE LED 2000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	102 74 040	102 74 140	102 74 240
DIM 1-10V	102 64 040	102 64 140	102 64 240
DIM DALI	102 34 040	102 34 140	102 34 240
230V/50Hz - 14,1W - incl. line voltage driver $\langle \rangle$ - parallel wiring ∇ \downarrow0.2m\equiv E CE - P - D - 2 Step MacAdam - CRI 80 - A			

MOOR 4 LARGE HAL	
REF N° 102 04 060	
E QT-DE - max 60 W - R7s (74.5mm) 230V/50Hz - $\langle \rangle$ - ∇ \downarrow0.5m\equiv E - CE - P - D - B	

MOOR 4 LARGE FLUO	
REF N° 102 04 026	
E TC-DEL 26W - G24q-3 - 230V/50Hz $\langle \rangle$ - incl. EVG - ∇ \downarrow0.5m\equiv E - CE - P - B	

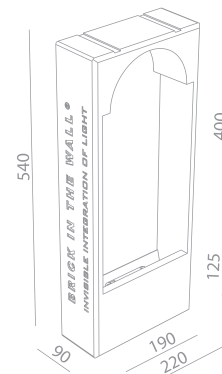

Ready for installation in solid walls
 Optional plasterkit for installation into gypsum walls

PLASTERKIT
MOOR LARGE 4/5
 REF N° 702 02 000 For mounting into gypsum walls



TECHNICAL DATA SHEET

MOOR 4 IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

□ 225x445 mm

Material : CALCYT® plaster

MOOR 4 LED WARMDIM 900LM 230VAC			
WARMDIM : DIMS FROM 3000°K TO 2000°K			
REF N°	2200°K	2700°K	3000°K
phase DIM	101 74 630	101 74 000	101 74 100
DIM 1-10V	101 64 630	101 64 000	101 64 100
DIM DALI	101 34 630	101 34 000	101 34 100
230V/50Hz - 12,8W - incl. line voltage driver $\langle \rangle$ - parallel wiring ∇ \downarrow0.2m \equiv E CE - P - 4 Step MacAdam - CRI 90 - B			


MOOR 4 LED 800LM 230VAC			
REF N°	2200°K	2700°K	3000°K
phase DIM	101 74 500	101 74 000	101 74 100
DIM 1-10V	101 64 500	101 64 000	101 64 100
DIM DALI	101 34 500	101 34 000	101 34 100
230V/50Hz - 9,3W - incl. line voltage driver $\langle \rangle$ - parallel wiring ∇ \downarrow0.2m \equiv E CE - P - 2 Step MacAdam - CRI 90 - R9=75 - A			

MOOR 4 LED 1000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	101 74 020	101 74 120	101 74 220
DIM 1-10V	101 64 020	101 64 120	101 64 220
DIM DALI	101 34 020	101 34 120	101 34 220
230V/50Hz - 11W - incl. line voltage driver $\langle \rangle$ - parallel wiring ∇ \downarrow0.2m \equiv E CE - P - 2 Step MacAdam - CRI 90 - R9=75 - A			

MOOR 4 LED 2000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	101 74 040	101 74 140	101 74 240
DIM 1-10V	101 64 040	101 64 140	101 64 240
DIM DALI	101 34 040	101 34 140	101 34 240
230V/50Hz - 14,1W - incl. line voltage driver $\langle \rangle$ - parallel wiring ∇ \downarrow0.2m \equiv E CE - P - 2 Step MacAdam - CRI 80 - A			

MOOR 4 HAL			
REF N° 101 04 060			
⚡ QT-DE - max 60 W - R7s (74.5mm) 230V/50Hz - $\langle \rangle$ - ∇ \downarrow0.5m \equiv E - CE - P - D			

MOOR 4 FLUO			
REF N° 101 04 026			
⚡ TC-DEL 26W - G24q-3 - 230V/50Hz $\langle \rangle$ - incl. EVG - ∇ \downarrow0.5m \equiv E - CE - P - B			

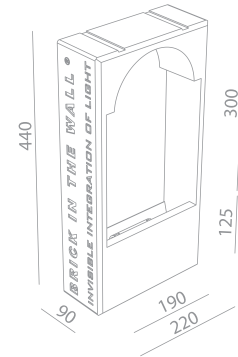

Ready for installation in solid walls
 Optional plasterkit for installation into gypsum walls

PLASTERKIT MOOR 4/5

REF N° 701 02 000 For mounting into gypsum walls



TECHNICAL DATA SHEET

MOOR 3 LARGE IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

□ 225x500 mm

Material : CALCYT® plaster

MOOR 3 LARGE LED WARMDIM 900LM 230VAC	
WARMDIM : DIMS FROM 3000°K TO 2000°K	
REF N° 102 73 630	phase DIM
REF N° 102 63 630	DIM 1-10V
REF N° 102 33 630	DIM DALI
230V/50Hz - 12,8W - incl. line voltage driver ◇ - parallel wiring ▽ (0.2m) E-CE-Ⓟ - 4 Step MacAdam - CRI 90 - B	


MOOR 3 LARGE LED 800LM 230VAC			
REF N°	2200°K	2700°K	3000°K
phase DIM	102 73 500	102 73 000	102 73 100
DIM 1-10V	102 63 500	102 63 000	102 63 100
DIM DALI	102 33 500	102 33 000	102 33 100
230V/50Hz - 9,3W - incl. line voltage driver ◇ - parallel wiring ▽ (0.2m) E-CE-Ⓟ - 2 Step MacAdam - CRI 90 - R9=75 - A			

MOOR 3 LARGE LED 1000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	102 73 020	102 73 120	102 73 220
DIM 1-10V	102 63 020	102 63 120	102 63 220
DIM DALI	102 33 020	102 33 120	102 33 220
230V/50Hz - 11W - incl. line voltage driver ◇ - parallel wiring ▽ (0.2m) E-CE-Ⓟ - 2 Step MacAdam - CRI 90 - R9=75 - A			

MOOR 3 LARGE LED 2000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	102 73 040	102 73 140	102 73 240
DIM 1-10V	102 63 040	102 63 140	102 63 240
DIM DALI	102 33 040	102 33 140	102 33 240
230V/50Hz - 14,1W - incl. line voltage driver ◇ - parallel wiring ▽ (0.2m) E-CE-Ⓟ - 2 Step MacAdam - CRI 80 - A+			

MOOR 3 LARGE HAL	
REF N° 102 03 060	
QT-DE - max 60 W - R7s (74.5mm) 230V/50Hz - ◇ - ▽ (0.5m) E-CE-Ⓟ - D	

MOOR 3 LARGE FLUO	
REF N° 102 03 026	
TC-DEL 26W - G24q-3 - 230V/50Hz ◇ - incl. EVG - ▽ (0.5m) E-CE-Ⓟ - B	

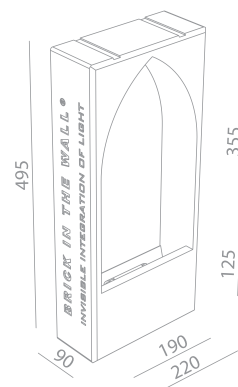

Ready for installation in solid walls
 Optional plasterkit for installation into gypsum walls

PLASTERKIT
MOOR LARGE 1/2/3
 REF N° 702 01 000 For mounting into gypsum walls



TECHNICAL DATA SHEET

MOOR 3 IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

□ 225x400 mm

Material : CALCYT® plaster

MOOR 3 LED WARMDIM 900LM 230VAC

WARMDIM : DIMS FROM 3000°K TO 2000°K

REF N° 101 73 630 phase DIM

REF N° 101 63 630 DIM 1-10V

REF N° 101 33 630 DIM DALI

230V/50Hz - 12,8W - incl. line voltage driver

◊ - parallel wiring ▽ (0.2m) E-CE - P - 4 Step MacAdam - CRI 90 - B

MOOR 3 LED 800LM 230VAC

REF N°	2200°K	2700°K	3000°K
phase DIM	101 73 500	101 73 000	101 73 100
DIM 1-10V	101 63 500	101 63 000	101 63 100
DIM DALI	101 33 500	101 33 000	101 33 100

230V/50Hz - 9,3W - incl. line voltage driver

◊ - parallel wiring ▽ (0.2m) E-CE - P - 2 Step MacAdam - CRI 90 - R9=75 - A

MOOR 3 LED 1000LM 230VAC

REF N°	2700°K	3000°K	4000°K
phase DIM	101 73 020	101 73 120	101 73 220
DIM 1-10V	101 63 020	101 63 120	101 63 220
DIM DALI	101 33 020	101 33 120	101 33 220

230V/50Hz - 11W - incl. line voltage driver

◊ - parallel wiring ▽ (0.2m) E-CE - P - 2 Step MacAdam - CRI 90 - R9=75 - A

MOOR 3 LED 2000LM 230VAC

REF N°	2700°K	3000°K	4000°K
phase DIM	101 73 040	101 73 140	101 73 240
DIM 1-10V	101 63 040	101 63 140	101 63 240
DIM DALI	101 33 040	101 33 140	101 33 240

230V/50Hz - 14,1W - incl. line voltage driver

◊ - parallel wiring ▽ (0.2m) E-CE - P - 2 Step MacAdam - CRI 80 - A+

MOOR 3 HAL

REF N° 101 03 060

QT-DE - max 60 W - R7s (74.5mm)


230V/50Hz - ◊ - ▽ (0.5m) E-CE - P - D

MOOR 3 FLUO

REF N° 101 03 026

TC-DEL 26W - G24q-3 - 230V/50Hz

◊ - incl. EVG - ▽ (0.5m) E-CE - P - B

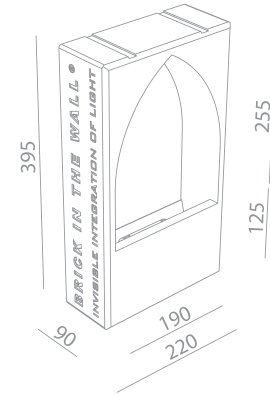

Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT MOOR 1/2/3
REF N° 701 01 000 For mounting into gypsum walls



TECHNICAL DATA SHEET

MOOR 2 LARGE IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

□ 225x500 mm

Material : CALCYT® plaster

MOOR 2 LARGE LED WARMDIM 900LM 230VAC	
WARMDIM : DIMS FROM 3000°K TO 2000°K	
REF N° 102 72 630	phase DIM
REF N° 102 62 630	DIM 1-10V
REF N° 102 32 630	DIM DALI
230V/50Hz - 12,8W - incl. line voltage driver ◇ - parallel wiring ▽ (0.2m) E-CE-Ⓟ - 4 Step MacAdam - CRI 90 - B	


MOOR 2 LARGE LED 800LM 230VAC			
REF N°	2200°K	2700°K	3000°K
phase DIM	102 72 500	102 72 000	102 72 100
DIM 1-10V	102 62 500	102 62 000	102 62 100
DIM DALI	102 32 500	102 32 000	102 32 100
230V/50Hz - 9,3W - incl. line voltage driver ◇ - parallel wiring ▽ (0.2m) E-CE-Ⓟ - 2 Step MacAdam - CRI 90 - R9=75 - A			

MOOR 2 LARGE LED 1000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	102 72 020	102 72 120	102 72 220
DIM 1-10V	102 62 020	102 62 120	102 62 220
DIM DALI	102 32 020	102 32 120	102 32 220
230V/50Hz - 11W - incl. line voltage driver ◇ - parallel wiring ▽ (0.2m) E-CE-Ⓟ - 2 Step MacAdam - CRI 90 - R9=75 - A			

MOOR 2 LARGE LED 2000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	102 72 040	102 72 140	102 72 240
DIM 1-10V	102 62 040	102 62 140	102 62 240
DIM DALI	102 32 040	102 32 140	102 32 240
230V/50Hz - 14,1W - incl. line voltage driver ◇ - parallel wiring ▽ (0.2m) E-CE-Ⓟ - 2 Step MacAdam - CRI 80 - A+			

MOOR 2 LARGE HAL	
REF N° 102 02 060	
QT-DE - max 60 W - R7s (74.5mm) 230V/50Hz - ◇ - ▽ (0.5m) E-CE-Ⓟ - D	

MOOR 2 LARGE FLUO	
REF N° 102 02 026	
TC-DEL 26W - G24q-3 - 230V/50Hz ◇ - incl. EVG - ▽ (0.5m) E-CE-Ⓟ - B	

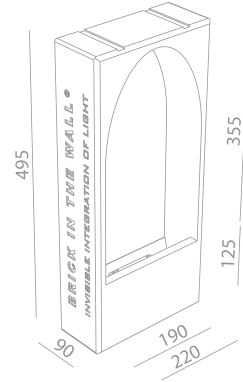

Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT
MOOR LARGE 1/2/3
REF N° 702 01 000 For mounting into gypsum walls



TECHNICAL DATA SHEET

MOOR 2 IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

□ 225x400 mm

Material : CALCYT® plaster

MOOR 2 LED WARMDIM 900LM 230VAC			
WARMDIM : DIMS FROM 3000°K TO 2000°K			
REF N°	2200°K	2700°K	3000°K
phase DIM	101 72 630	101 72 000	101 72 100
DIM 1-10V	101 62 630	101 62 000	101 62 100
DIM DALI	101 32 630	101 32 000	101 32 100
230V/50Hz - 12,8W - incl. line voltage driver $\langle \rangle$ - parallel wiring ∇ \downarrow0.2m \equiv E CE - P - D - 4 Step MacAdam - CRI 90 - B \rightarrow			


MOOR 2 LED 800LM 230VAC			
REF N°	2200°K	2700°K	3000°K
phase DIM	101 72 500	101 72 000	101 72 100
DIM 1-10V	101 62 500	101 62 000	101 62 100
DIM DALI	101 32 500	101 32 000	101 32 100
230V/50Hz - 9,3W - incl. line voltage driver $\langle \rangle$ - parallel wiring ∇ \downarrow0.2m \equiv E CE - P - D - 2 Step MacAdam - CRI 90 - R9=75 - A \rightarrow			

MOOR 2 LED 1000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	101 72 020	101 72 120	101 72 220
DIM 1-10V	101 62 020	101 62 120	101 62 220
DIM DALI	101 32 020	101 32 120	101 32 220
230V/50Hz - 11W - incl. line voltage driver $\langle \rangle$ - parallel wiring ∇ \downarrow0.2m \equiv E CE - P - D - 2 Step MacAdam - CRI 90 - R9=75 - A \rightarrow			

MOOR 2 LED 2000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	101 72 040	101 72 140	101 72 240
DIM 1-10V	101 62 040	101 62 140	101 62 240
DIM DALI	101 32 040	101 32 140	101 32 240
230V/50Hz - 14,1W - incl. line voltage driver $\langle \rangle$ - parallel wiring ∇ \downarrow0.2m \equiv E CE - P - D - 2 Step MacAdam - CRI 80 - A \rightarrow			

MOOR 2 HAL	
REF N°	101 02 060
E QT-DE - max 60 W - R7s (74.5mm) 230V/50Hz - $\langle \rangle$ - ∇ \downarrow0.5m \equiv E - CE - P - D \rightarrow	

MOOR 2 FLUO	
REF N°	101 02 026
E TC-DEL 26W - G24q-3 - 230V/50Hz $\langle \rangle$ - incl. EVG - ∇ \downarrow0.5m \equiv E - CE - P - B \rightarrow	

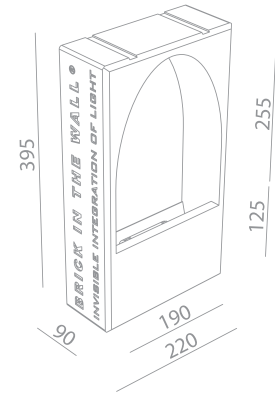

Ready for installation in solid walls
 Optional plasterkit for installation into gypsum walls

PLASTERKIT MOOR 1/2/3
 REF N° 701 01 000 For mounting into gypsum walls



TECHNICAL DATA SHEET

MOOR 1 LARGE IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

□ 225x500 mm

Material : CALCYT® plaster

MOOR 1 LARGE LED WARMDIM 900LM 230VAC	
WARMDIM : DIMS FROM 3000°K TO 2000°K	
REF N°	102 71 630 phase DIM
REF N°	102 61 630 DIM 1-10V
REF N°	102 31 630 DIM DALI
230V/50Hz - 12,8W - incl. line voltage driver ◊ - parallel wiring ▽ 0.2m E-CE-Ⓟ - 4 Step MacAdam - CRI 90 - B	


MOOR 1 LARGE LED 800LM 230VAC			
REF N°	2200°K	2700°K	3000°K
phase DIM	102 71 500	102 71 000	102 71 100
DIM 1-10V	102 61 500	102 61 000	102 61 100
DIM DALI	102 31 500	102 31 000	102 31 100
230V/50Hz - 9,3W - incl. line voltage driver ◊ - parallel wiring ▽ 0.2m E-CE-Ⓟ - 2 Step MacAdam - CRI 90 - R9=75 - A			

MOOR 1 LARGE LED 1000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	102 71 020	102 71 120	102 71 220
DIM 1-10V	102 61 020	102 61 120	102 61 220
DIM DALI	102 31 020	102 31 120	102 31 220
230V/50Hz - 11W - incl. line voltage driver ◊ - parallel wiring ▽ 0.2m E-CE-Ⓟ - 2 Step MacAdam - CRI 90 - R9=75 - A			

MOOR 1 LARGE LED 2000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	102 71 040	102 71 140	102 71 240
DIM 1-10V	102 61 040	102 61 140	102 61 240
DIM DALI	102 31 040	102 31 140	102 31 240
230V/50Hz - 14,1W - incl. line voltage driver ◊ - parallel wiring ▽ 0.2m E-CE-Ⓟ - 2 Step MacAdam - CRI 80 - A+			

MOOR 1 LARGE HAL	
REF N°	102 01 060
QT-DE - max 60 W - R7s (74.5mm) 230V/50Hz - ◊ - ▽ 0.5m E-CE-Ⓟ - D	

MOOR 1 LARGE FLUO	
REF N°	102 01 026
TC-DEL 26W - G24q-3 - 230V/50Hz ◊ - incl. EVG - ▽ 0.5m E-CE-Ⓟ - B	

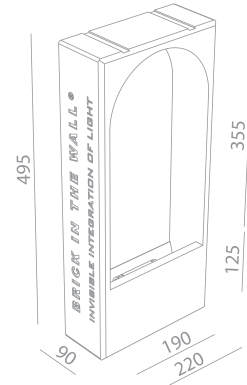

Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT
MOOR LARGE 1/2/3
REF N° 702 01 000 For mounting into gypsum walls



TECHNICAL DATA SHEET

MOOR 1 IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

□ 225x400 mm

Material : CALCYT® plaster

MOOR 1 LED WARMDIM 900LM 230VAC

WARMDIM : DIMS FROM 3000°K TO 2000°K

REF N° 101 71 630 phase DIM

REF N° 101 61 630 DIM 1-10V

REF N° 101 31 630 DIM DALI

230V/50Hz - 12,8W - incl. line voltage driver
 ◇ - parallel wiring ▽ Ⓢ 0.2m Ⓢ E-CE - Ⓢ - Ⓢ -
 4 Step MacAdam - CRI 90 - B

MOOR 1 LED 800LM 230VAC

REF N°	2200°K	2700°K	3000°K
phase DIM	101 71 500	101 71 000	101 71 100
DIM 1-10V	101 61 500	101 61 000	101 61 100
DIM DALI	101 31 500	101 31 000	101 31 100

230V/50Hz - 9,3W - incl. line voltage driver
 ◇ - parallel wiring ▽ Ⓢ 0.2m Ⓢ E-CE - Ⓢ - Ⓢ -
 2 Step MacAdam - CRI 90 - R9=75 - A

MOOR 1 LED 1000LM 230VAC

REF N°	2700°K	3000°K	4000°K
phase DIM	101 71 020	101 71 120	101 71 220
DIM 1-10V	101 61 020	101 61 120	101 61 220
DIM DALI	101 31 020	101 31 120	101 31 220

230V/50Hz - 11W - incl. line voltage driver
 ◇ - parallel wiring ▽ Ⓢ 0.2m Ⓢ E-CE - Ⓢ - Ⓢ -
 2 Step MacAdam - CRI 90 - R9=75 - A

MOOR 1 LED 2000LM 230VAC

REF N°	2700°K	3000°K	4000°K
phase DIM	101 71 040	101 71 140	101 71 240
DIM 1-10V	101 61 040	101 61 140	101 61 240
DIM DALI	101 31 040	101 31 140	101 31 240

230V/50Hz - 14,1W - incl. line voltage driver
 ◇ - parallel wiring ▽ Ⓢ 0.2m Ⓢ E-CE - Ⓢ - Ⓢ -
 2 Step MacAdam - CRI 80 - A+

MOOR 1 HAL


REF N° 101 01 060

Ⓢ QT-DE - max 60 W - R7s (74.5mm)
 230V/50Hz - ◇ - ▽ Ⓢ 0.5m Ⓢ E-CE - Ⓢ - Ⓢ -

MOOR 1 FLUO

REF N° 101 01 026

Ⓢ TC-DEL 26W - G24q-3 - 230V/50Hz
 ◇ - incl. EVG - ▽ Ⓢ 0.5m Ⓢ E-CE - Ⓢ - Ⓢ -

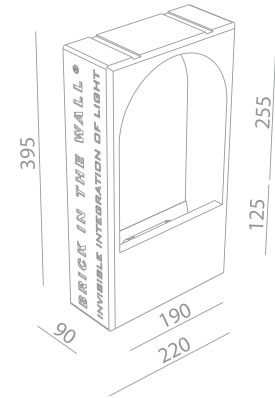

Ready for installation in solid walls
 Optional plasterkit for installation into gypsum walls

PLASTERKIT MOOR 1/2/3
 REF N° 701 01 000 For mounting into gypsum walls

