

TECHNICAL DATA SHEET


OZON M IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

182x337 mm

Material : CALCYT® plaster

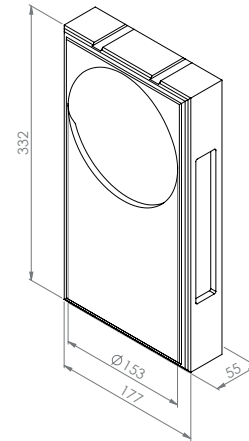

OZON M LED WARMDIM 500LM 230VAC

WARMDIM : DIMS FROM 3000°K TO 2000°K

REF N° 119 71 600 phase DIM

REF N° 119 61 600 DIM 1-10V

REF N° 119 31 600 DIM DALI

230V/50Hz - 6W - incl. line voltage driver
 ◊ - parallel wiring ▽ 0.2m E CE - © -
 4 Step MacAdam - CRI 80 - B

OZON M LED 800LM 230VAC

REF N°	2200°K	2700°K	3000°K
phase DIM	119 71 500	119 71 000	119 71 100
DIM 1-10V	119 61 500	119 61 000	119 61 100
DIM DALI	119 31 500	119 31 000	119 31 100

230V/50Hz - 9,3W - incl. line voltage driver
 ◊ - parallel wiring ▽ 0.2m E CE - © -
 2 Step MacAdam - CRI 90 - R9=75 - A

OZON M LED 1500LM 230VAC

REF N°	2700°K	3000°K	4000°K
phase DIM	119 73 000	119 73 100	119 73 200
DIM 1-10V	119 63 000	119 63 100	119 63 200
DIM DALI	119 33 000	119 33 100	119 33 200

230V/50Hz - 9,6W - incl. line voltage driver
 ◊ - parallel wiring ▽ 0.2m E CE - © -
 2 Step MacAdam - CRI 80 - A+

Ready for installation in solid walls
 Optional plasterkit for installation into gypsum walls

PLASTERKIT OZON M
 REF N° 703 01 000 For mounting into gypsum walls



TECHNICAL DATA SHEET


OZON L IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

□ 225x380 mm

Material : CALCYT® plaster

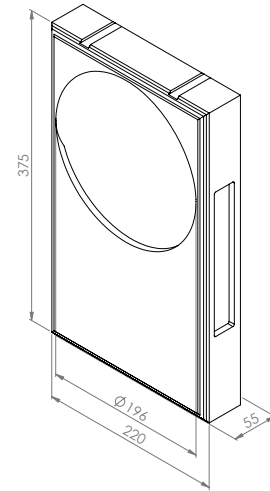

OZON L LED WARMDIM 500LM 230VAC

WARMDIM : DIMS FROM 3000°K TO 2000°K

REF N° 120 71 600 phase DIM

REF N° 120 61 600 DIM 1-10V

REF N° 120 31 600 DIM DALI

230V/50Hz - 6W - incl. line voltage driver
 ◇ - parallel wiring ▽ 0.2m E-CE - Ⓟ -
 4 Step MacAdam - CRI 80 - B

OZON L LED 800LM 230VAC

REF N°	2200°K	2700°K	3000°K
phase DIM	120 71 500	120 71 000	120 71 100
DIM 1-10V	120 61 500	120 61 000	120 61 100
DIM DALI	120 31 500	120 31 000	120 31 100

230V/50Hz - 9,3W - incl. line voltage driver
 ◇ - parallel wiring ▽ 0.2m E-CE - Ⓟ -
 2 Step MacAdam - CRI 90 - R9=75 - A

OZON L LED 1500LM 230VAC

REF N°	2700°K	3000°K	4000°K
phase DIM	120 73 000	120 73 100	120 73 200
DIM 1-10V	120 63 000	120 63 100	120 63 200
DIM DALI	120 33 000	120 33 100	120 33 200

230V/50Hz - 9,6W - incl. line voltage driver
 ◇ - parallel wiring ▽ 0.2m E-CE - Ⓟ -
 2 Step MacAdam - CRI 80 - A+

Ready for installation in solid walls
 Optional plasterkit for installation into gypsum walls

PLASTERKIT OZON L

REF N° 715 01 000 For mounting into gypsum walls

