

# TECHNICAL DATA SHEET

## QUBY IP54

OUTDOOR - ESTERNO - AUßENBEREICH - EXTERIEUR - EXTÉRIEUR - EXTERIOR

Fix (not adjustable) 0° - 0°

132x132 mm

Material : waterproof CALCYT+® and frosted diffusor

### REMOTE LED DRIVER ON/OFF

REF N° 697 00 006 8W

REF N° 697 00 015 15W

REF N° 697 00 025 25W

230V/50Hz - - current controlled  
 - - IP20 - 350mA - not dimmable

### QUBY LED DIM 100 LM

REF N° 126 60 505 CRI 80 warm white 2200°K

REF N° 126 60 005 CRI 90 warm white 2700°K

REF N° 126 60 105 CRI 90 warm white 3000°K

REF N° 126 60 205 CRI 90 neutral white 4000°K

REF N° 126 60 305 royal blue

- 1W - excl. LED driver - current controlled 350 mA - - -   
 - - serial wiring - 3 Step MacAdam  
Requires remote LED driver - 350 mA

### REMOTE LED DRIVER DIM

REF N° 697 60 006 6W 1-10V

REF N° 697 60 015 15W 1-10V

REF N° 697 30 015 15W DALI

REF N° 697 60 025 25W 1-10V DALI PUSH

REF N° 697 60 040 40W 1-10V DALI PUSH

REF N° 697 70 009 9W PHASE DIM (tr. edge)

REF N° 697 70 017 17W PHASE DIM

230V/50Hz - - current controlled  
 - - IP20 - 350mA - dimmable

### QUBY LED DIM 200 LM

REF N° 126 62 505 CRI 80 warm white 2200°K

REF N° 126 62 005 CRI 90 warm white 2700°K

REF N° 126 62 105 CRI 90 warm white 3000°K

REF N° 126 62 205 CRI 90 neutral white 4000°K

REF N° 126 62 305 royal blue

- 2W - excl. LED driver - current controlled 350 mA - - -   
 - - serial wiring - 3 Step MacAdam  
Requires remote LED driver - 350 mA

### QUBY LED DIM 400 LM

REF N° 126 61 505 CRI 80 warm white 2200°K


REF N° 126 61 005 CRI 90 warm white 2700°K

REF N° 126 61 105 CRI 90 warm white 3000°K

REF N° 126 61 205 CRI 90 neutral white 4000°K

REF N° 126 61 305 royal blue

- 4W - excl. LED driver - current controlled 350 mA - - -   
 - - serial wiring - 3 Step MacAdam  
Requires remote LED driver - 350 mA

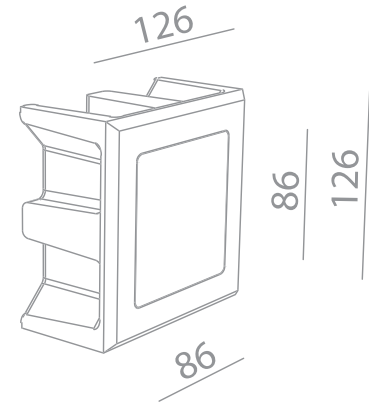


Ready for installation in solid walls  
Optional plasterkit for installation into gypsum walls

### PLASTERKIT QUBY

REF N° 725 01 000 For mounting into gypsum walls

Housing: perforated aluminium



# TECHNICAL DATA SHEET

## QUBY IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

132x132 mm




Material : CALCYT® plaster and frosted diffuser

### REMOTE LED DRIVER ON/OFF

REF N° 697 00 006 8W

REF N° 697 00 015 15W

REF N° 697 00 025 25W

230V/50Hz -  - current controlled  
 -  - IP20 - 350mA - not dimmable

### QUBY LED DIM 100 LM







REF N° 126 60 500 CRI 80 warm white 2200°K

REF N° 126 60 000 CRI 90 warm white 2700°K

REF N° 126 60 100 CRI 90 warm white 3000°K

REF N° 126 60 200 CRI 90 neutral white 4000°K

REF N° 126 60 300 royal blue

 - 1W - excl. LED driver - current controlled 350 mA -  -  -  -  -  - serial wiring - 3 Step MacAdam  
 Requires remote LED driver - 350 mA

### REMOTE LED DRIVER DIM

REF N° 697 60 006 6W 1-10V

REF N° 697 60 015 15W 1-10V




REF N° 697 30 015 15W DALI

REF N° 697 60 025 25W 1-10V DALI PUSH

REF N° 697 60 040 40W 1-10V DALI PUSH

REF N° 697 70 009 9W PHASE DIM (tr. edge)

REF N° 697 70 017 17W PHASE DIM

230V/50Hz -  - current controlled  
 -  - IP20 - 350mA - dimmable

### QUBY LED DIM 200 LM







REF N° 126 62 500 CRI 80 warm white 2200°K

REF N° 126 62 000 CRI 90 warm white 2700°K

REF N° 126 62 100 CRI 90 warm white 3000°K

REF N° 126 62 200 CRI 90 neutral white 4000°K

REF N° 126 62 300 royal blue

 - 2W - excl. LED driver - current controlled 350 mA -  -  -  -  -  - serial wiring - 3 Step MacAdam  
 Requires remote LED driver - 350 mA

### QUBY LED DIM 400 LM







REF N° 126 61 500 CRI 80 warm white 2200°K


REF N° 126 61 000 CRI 90 warm white 2700°K

REF N° 126 61 100 CRI 90 warm white 3000°K

REF N° 126 61 200 CRI 90 neutral white 4000°K

REF N° 126 61 300 royal blue


 - 4W - excl. LED driver - current controlled 350 mA -  -  -  -  -  - serial wiring - 3 Step MacAdam  
 Requires remote LED driver - 350 mA

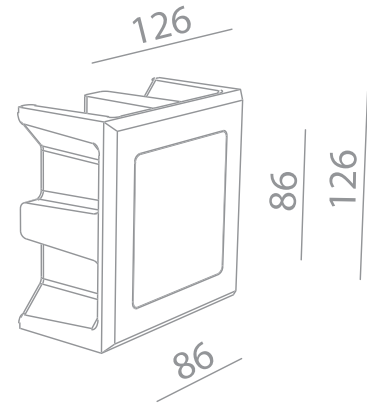


Ready for installation in solid walls  
 Optional plasterkit for installation into gypsum walls

### PLASTERKIT QUBY

REF N° 725 01 000 For mounting into gypsum walls  
 Housing: perforated aluminium



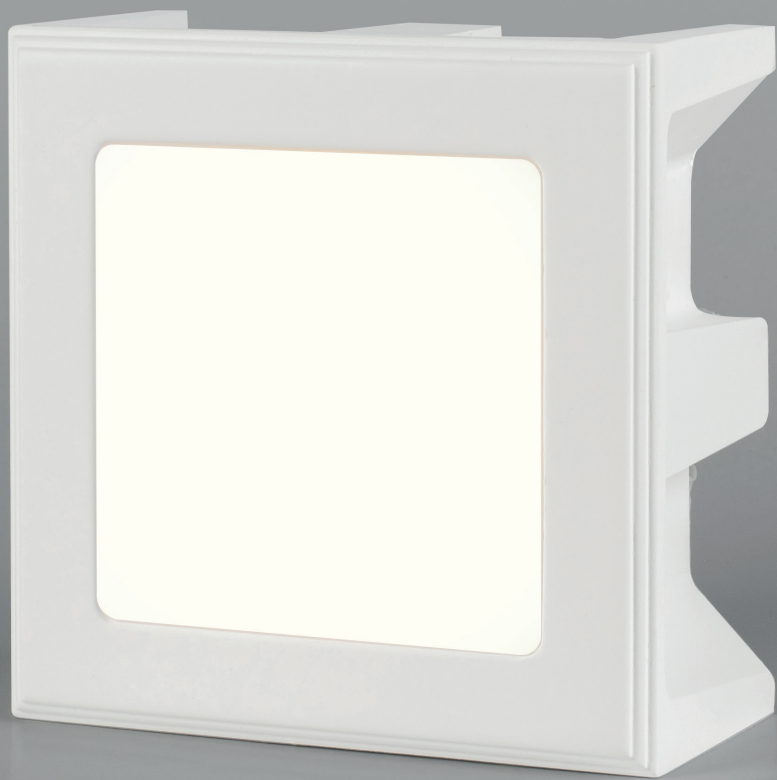

# TECHNICAL DATA SHEET

## QUBY IP54

BATHROOM - STANZA DA BAGNO - BADEZIMMER - BADKAMER - SALLE DE BAINS - CUARTO DE BAÑO

Fix (not adjustable) 0° - 0°

132x132 mm




Material : CALCYT® plaster and frosted diffuser

### REMOTE LED DRIVER ON/OFF

REF N° 697 00 006 8W

REF N° 697 00 015 15W

REF N° 697 00 025 25W

230V/50Hz -  - current controlled  
 -  - IP20 - 350mA - not dimmable

### QUBY LED DIM 100 LM







REF N° 126 60 501 CRI 80 warm white 2200°K

REF N° 126 60 001 CRI 90 warm white 2700°K

REF N° 126 60 101 CRI 90 warm white 3000°K

REF N° 126 60 201 CRI 90 neutral white 4000°K

REF N° 126 60 301 royal blue

 - 1W - excl. LED driver - current controlled 350 mA -  -  -  -  -  - serial wiring - 3 Step MacAdam  
 Requires remote LED driver - 350 mA

### REMOTE LED DRIVER DIM

REF N° 697 60 006 6W 1-10V

REF N° 697 60 015 15W 1-10V




REF N° 697 30 015 15W DALI

REF N° 697 60 025 25W 1-10V DALI PUSH

REF N° 697 60 040 40W 1-10V DALI PUSH

REF N° 697 70 009 9W PHASE DIM (tr. edge)

REF N° 697 70 017 17W PHASE DIM

230V/50Hz -  - current controlled  
 -  - IP20 - 350mA - dimmable

### QUBY LED DIM 200 LM







REF N° 126 62 501 CRI 80 warm white 2200°K

REF N° 126 62 001 CRI 90 warm white 2700°K

REF N° 126 62 101 CRI 90 warm white 3000°K

REF N° 126 62 201 CRI 90 neutral white 4000°K

REF N° 126 62 301 royal blue

 - 2W - excl. LED driver - current controlled 350 mA -  -  -  -  -  - serial wiring - 3 Step MacAdam  
 Requires remote LED driver - 350 mA

### QUBY LED DIM 400 LM







REF N° 126 61 501 CRI 80 warm white 2200°K


REF N° 126 61 001 CRI 90 warm white 2700°K

REF N° 126 61 101 CRI 90 warm white 3000°K

REF N° 126 61 201 CRI 90 neutral white 4000°K

REF N° 126 61 301 royal blue

 - 4W - excl. LED driver - current controlled 350 mA -  -  -  -  -  - serial wiring - 3 Step MacAdam  
 Requires remote LED driver - 350 mA

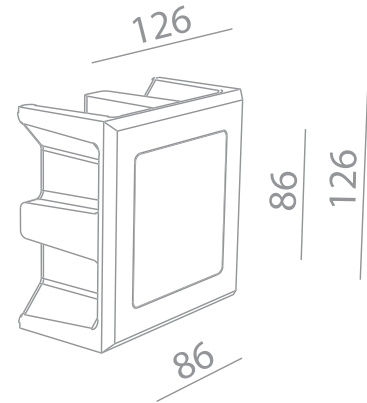

Ready for installation in solid walls  
 Optional plasterkit for installation into gypsum walls

### PLASTERKIT QUBY

REF N° 725 01 000 For mounting into gypsum walls  
 Housing: perforated aluminium

